

The FR Series range of Oxygen Service 25 micron Sintered Particulate Filters is principally designed for the removal of particulates from oxygen gas.


This range offers an extremely robust, efficient and cost effective solution.

Main Features	Benefits
Rugged robust inline before system/panel filtration	Keeps the gas particulate free
Pipe work mountable	Simple installation
Ready to use straight out of the box	Very low maintenance
Coarse filtration down to 25 micron	

FR084F	
Dimensions	78mm x 60mm x 41mm
Weight	1.0kg
Temperature Range	-10°C to +50°C
Mounting	Vertical mounting only, suspended from pipe
Design Pressure	27.6 bar
Inlet and outlet threads	3/8" BSP
Coalescing micron size	25 microns
Replacement Element	FR084E



Flow Characteristics of Air

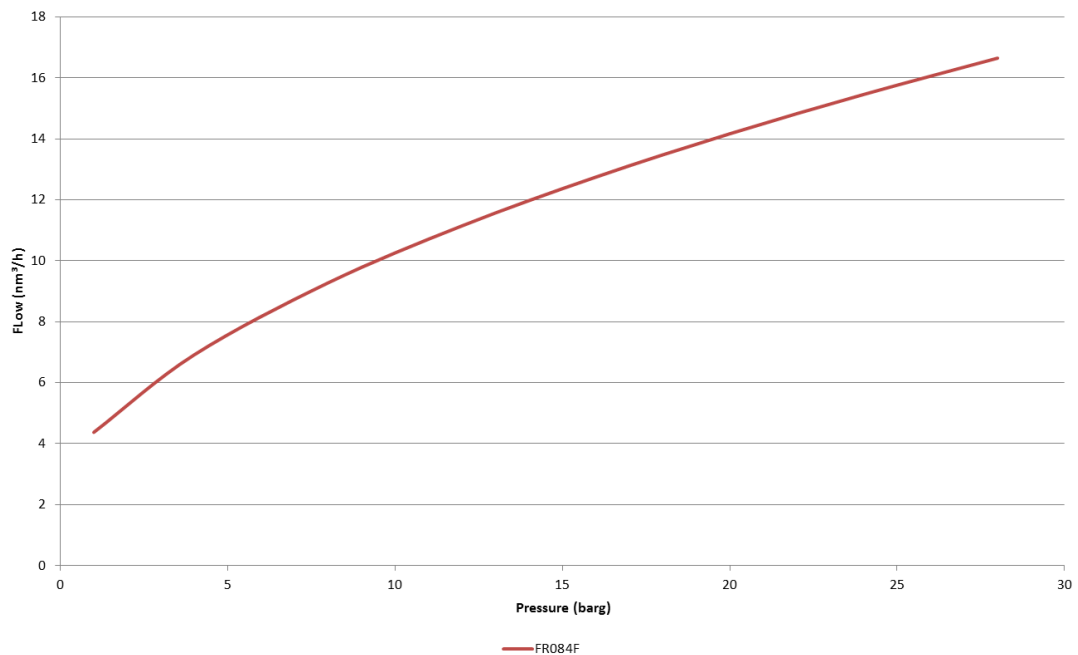

Flow characteristics above assume a pressure drop of 0.14bar across filter

BSL Gas Technologies Ltd

101 Laker Road, Rochester Airport Industrial Estate, Rochester, ME1 3QX, United Kingdom

Tel: +44 (0) 1634 661100

web: www.bslgastech.com


Fax: +44 (0) 1634 671111

email: info@bslgastech.com

FR094F	
Dimensions	154mm x 90mm x 67mm
Weight	3.2kg
Temperature Range	-10°C to +50°C
Mounting	Vertical mounting only, suspended from pipe
Design Pressure	27.6 bar
Inlet and outlet threads	3/4" BSP
Coalescing micron size	25 microns
Replacement Element	FR094E



Flow Characteristics of Air

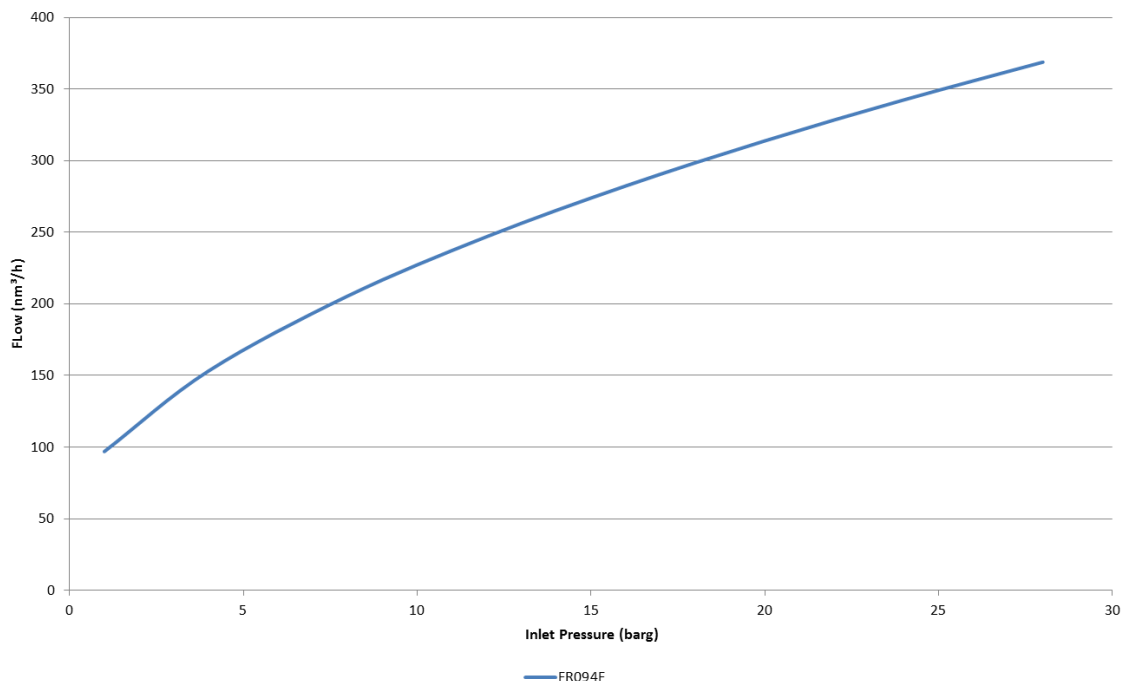

Flow characteristics above assume a pressure drop of 0.14bar across filter

Every effort has been taken in the creation of this document, however due to our policy of on-going improvement this specification sheet is subject to change without notification and no warranty is given or implied regarding correctness of content.



Affiliated Organisations

FM: 46063

BSL Gas Technologies Ltd

101 Laker Road, Rochester Airport Industrial Estate, Rochester, ME1 3QX, United Kingdom

Tel: +44 (0) 1634 661100

web: www.bslgastech.com

Fax: +44 (0) 1634 671111

email: info@bslgastech.com